




## **EHB Lid Unit 600**



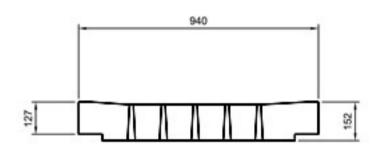





Position of expansion joint as required by dersigner -min 500mm from edge of Althon lid
Pavement quality concrete reinforced to designers specification
10-15mm Althon high strength bedding mortar
Haunch (min.125mm -max. 250mm from top level of channel
Geotextile membrane (dependant on ground conditions)
Grate ST4 concrete, min slump 50mm well compacted around channel
Grade ST4 concrete semidry bed

- Precast lid unit
- Slots flared to minimise blockage
- Rodding eyes can be cast to facilitate easy maintenance
- Lid dished to enhance catchment of surface water run-off

The EHB lid unit has been designed for use in areas trafficked by articulated HGV vehicles.

